


# BCS VIVID 400 DT



VIVID 400 DT	A	B	C	D	E min/max	F min/max	G	H	I	L
mm	316	1553	407	2276	856/1209	1035/1384	256	1103	1996	675

Dæktype med relevante fælg	A Hjulspor min/max mm.	B Bredde min/max mm.
6.50/80-12 - 250/80-18 Med justerbar fælg	Front 865-1114	Front 1021-1279
	Bag 795-1109	Bag 1135-1349
6.50/80-12 - 280/70-18 Med justerbar fælg	Front 865-1114	Front 1021-1279
	Bag 839-1065	Bag 1121-1347
6.50/80-12 - 11.50/80-15,3 Med justerbar fælg	Front 856-1114	Front 1021-1279
	Bag 913-1089	Bag 1200-1376
6.50/80-12 - 320/65-18 Med justerbar fælg	Front 856-1114	Front 1021-1279
	Bag 873-1065	Bag 1192-1384
25x8.50-14 * 36x13.50-15 Græs Med fast fælg	Front 960-996	Front 945-961
	Bag 1173-1209	Bag 1326-1342

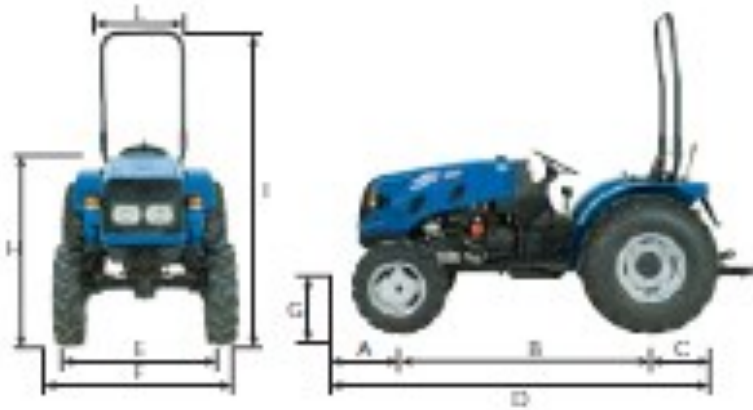